FDA Class II Medical Device<sup>1</sup>



TRAVEL/SCOOTER COLLECTION

З Wrangler®

4-5 Zero Turn 8<sup>1</sup> / Zero Turn 10<sup>1</sup>

6-7 iRIDE™ / Go-Go Elite Traveller<sup>®</sup> Plus<sup>1</sup>

8-9 Go-Go Elite Traveller<sup>®1</sup>/ Go-Go<sup>®</sup> Sport<sup>1</sup>

**IO-II** Go-Go<sup>®</sup> Folding Scooter<sup>1</sup>/ Go-Go<sup>®</sup> LX with CTS Suspension<sup>1</sup>

12-13 Go-Go<sup>®</sup> Ultra X<sup>1</sup> / Go-Go<sup>®</sup> ES2<sup>1</sup>

14-15 Revo<sup>®</sup> 2.0<sup>1</sup> / Victory<sup>®</sup> LX Sport<sup>1</sup>

> 16-17 Raptor / Victory<sup>®</sup> 10.2<sup>1</sup>

18-19 Victory<sup>®</sup> 10<sup>1</sup> / Victory<sup>®</sup> 9<sup>1</sup>

20-21 Maxima<sup>1</sup> / Accessories







94.75" Turning Radius

Up To II.Hmph Maximum Speed

**350**Ibs. Weight Capacity



Non-Medical Device



Feel the crisp, fresh air and enjoy the peaceful serenity of the outdoors. Forge a new path with the Wrangler<sup>®</sup>, an aggressive, outdoor scooter designed for extreme and rugged conditions. With powerful suspension, bright lighting and dual hydraulic brakes, this beast of a scooter is a powerful force.



Your mobility has turned a corner with the Zero Turn 8, an innovative scooter equipped with *iTurn Technology*<sup>™</sup>, enabling you to maneuver this scooter through small spaces and around tight corners! Plus, enjoy full lighting, plenty of storage and a USB charger.



FDA Class II Medical Device<sup>1</sup>

13.1

**B7.25**" Turning Radius



B251bs. Weight Capacity



24



7.2mph

HOOIDS.



FDA Class II Medical Device<sup>1</sup>




The Zero Turn 10 can traverse the most beautiful, out-of-reach places and move seamlessly through doors and hallways in your home. This scooter combines powerful dual motors and two-wheel drive with revolutionary turning technology. Let the Zero Turn 10 carry you to places unknown.



Journey far and wide with the **iRIDE**! This ultra-lightweight scooter is super portable and perfect for traveling. Equipped with both a manual hand brake and supplemental foot brake, the iRIDE delivers a safe and comfortable ride!





12.7 Miles Per Charge at 200 lbs.

33.5 Turning Radius

**3.7**mph Maximum Speed

250lbs. Weight Capacity









Also available in 3-wheel. Please see back two pages for specs.



It's perfect for traveling, PLUS so much more! The **Go-Go** Elite Traveller<sup>®</sup> Plus offers easy disassembly and includes an ergonomic tiller for one-handed operation. Today's fast-paced world is no match for this stylish and portable scooter.

FDA Class II Medical Device<sup>1</sup>



Every day is a new adventure with the **Go-Go Elite Traveller**<sup>®</sup>, an exceptionally stable and maneuverable travel scooter. With easy disassembly and a convenient storage basket, the Go-Go Elite Traveller<sup>®</sup> keeps up with your active life!



FDA Class II Medical Device<sup>1</sup>



ЧЧ"

Hmph

300Ibs. Weight Capacity

Also available in 3-wheel. Please see back two pages for specs.











Uр То **4.7**mph Maximum Speed



Also available in 3-wheel. Please see back two pages for specs.



It's time to make your mark on this world! The **Go-Go<sup>®</sup> Sport** offers simple disassembly and an ergonomic delta tiller, perfect for one-handed operation. Enjoy the versatility of this sporty scooter, as well as bright LED lighting.

FDA Class II Medical Device<sup>1</sup>



With the Go-Go<sup>®</sup> Folding **Scooter**, the world is at your fingertips! With a unique folding design, this scooter folds in just three simple steps and fits easily in a closet, corner or vehicle trunk! Enjoy full lighting and speeds up to 4 mph.








Hmph

**250**Ibs. Weight Capacity





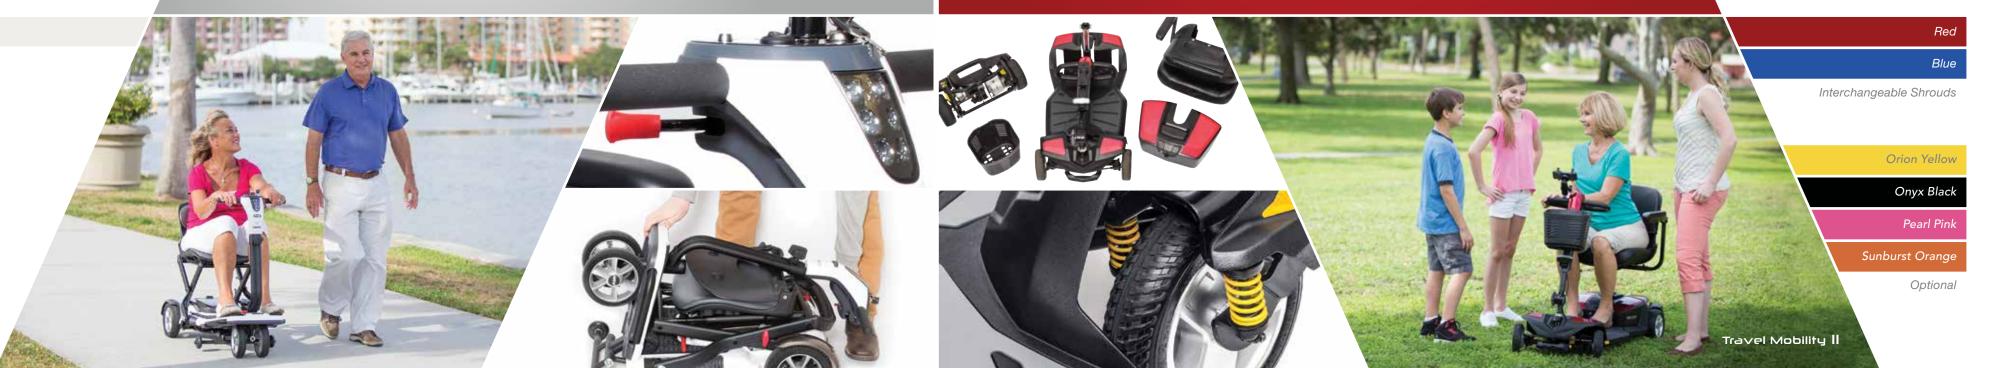



Uр То Maximum Speed



Also available in 3-wheel. Please see back two pages for specs.



There's smooth, and then there's the Go-Go<sup>®</sup> LX with CTS! This scooter has revolutionary suspension for the smoothest, most comfortable ride. From the park to your backyard, this feature-rich scooter offers best-in-class ride quality.

FDA Class II Medical Device<sup>1</sup>



Enjoy worry-free travel with the Go-Go<sup>®</sup> Ultra X, an ultracompact scooter that is simple to disassemble. Ride in comfort and style with the foldable swivel seat and keep your personal items handy with the front basket.



FDA Class II Medical Device<sup>1</sup>





Uр То Lmph Maximum Speed

**260**Ibs. Weight Capacity

Also available in 3-wheel. Please see back two pages for specs.



3|" Turning Radius







Uр То Hmph Maximum Speed





FDA Class II Medical Device<sup>1</sup>



Get ready to go with the Go-Go<sup>®</sup> ES 2 Scooter! Compact and lightweight, this scooter has two speed settings for ultimate versatility, whether you are indoors or outdoors. It's perfect for errands and quick trips! Plus, a front basket provides plenty of storage space.



Robustly rugged meets brilliant convenience. With the Revo<sup>®</sup> 2.0, there is nothing you can't handle! This tough and dependable scooter has powerful suspension for a smooth ride, yet easily disassembles for full portability.



FDA Class II Medical Device<sup>1</sup>











Uр То 19.7 Miles Per Charge at 200 lbs.

61.25" Turning Radius

> Up To 8mph Maximum Speed

HOOIDS. Weight Capacity

FDA Class II Medical Device<sup>1</sup>



You're active and always on the go. You need a scooter that is up to the task! Appeal to your sporty side with the Victory® LX Sport. Enjoy premium suspension, bright lighting and other sophisticated features, all in one sporty package.



Do you have the need for speed? The **Raptor** drives at speeds up to 14 mph. Equipped with a regenerative braking system, ample storage and complete LED lighting, the Raptor appeals to the adventurer within you!



Non-Medical Device

Miles Per Charge at 220 lbs.

60"

Hmph

Weight Capacity











Uр То 5.2mph Maximum Speed



Also available in 3-wheel. Please see back two pages for specs.



Embrace your potential! The Victory<sup>®</sup> 10.2 is fully loaded with style and advanced features, including frosted LED headlights and an integrated storage space with cup holder. Drive at speeds up to 5.2 mph and see what life has in store for you!

FDA Class II Medical Device<sup>1</sup>



Versatility knows no bounds with the Victory<sup>®</sup> 10. Enjoy simple disassembly with one hand and drive up to 16 miles on a single charge. You won't miss a beat with this scooter, which includes a bright LED headlight. Anything is possible with the Victory<sup>®</sup> 10!



FDA Class II Medical Device<sup>1</sup>

















Up To 5.3mph Maximum Speed



Also available in 3-wheel. Please see back two pages for specs.





Sophisticated and stylish, the Victory<sup>®</sup> 9 is everything you could want in a scooter. The delta tiller lets you operate the scooter with a single hand. Enjoy easy disassembly and plenty of lighting with the LED headlight.

FDA Class II Medical Device<sup>1</sup>

## MAXIMA

Heavy duty and robust, the Maxima scooter maximizes your potential! Drive at speeds up to 5.3 mph and experience a fully adjustable tiller. Enjoy the convenience of the front basket, perfect for storing your personal items.



FDA Class II Medical Device<sup>1</sup>




50.5" Turning Radius


Uр То 5.3mph Maximum Speed


**500**Ibs. Weight Capacity

Also available in 3-wheel. Please see back two pages for specs.



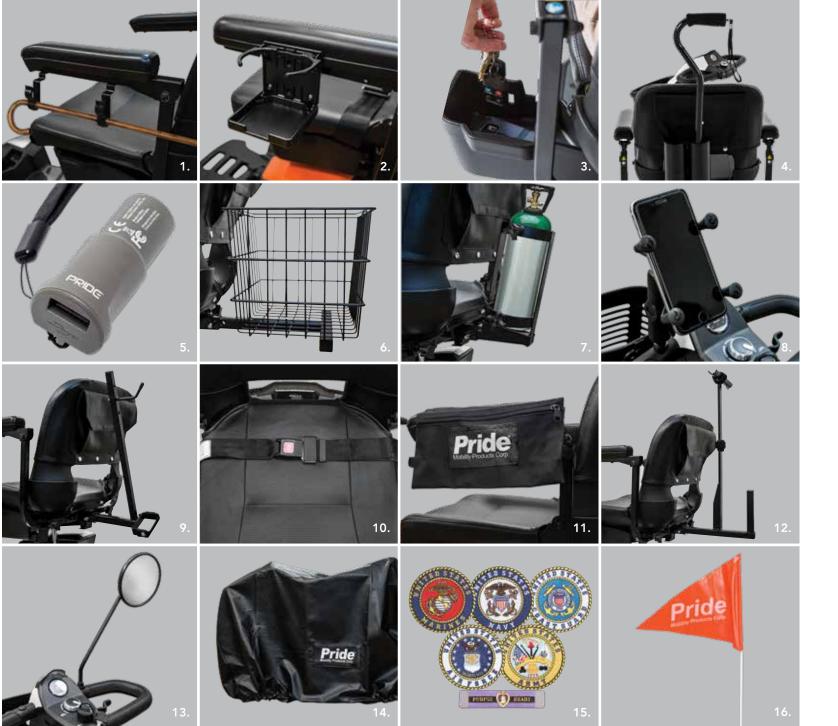

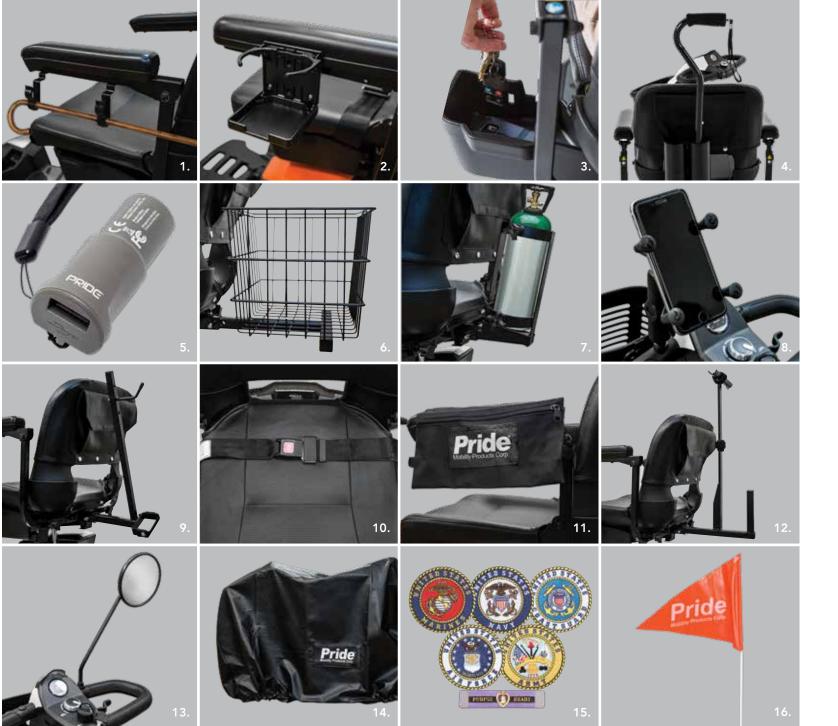

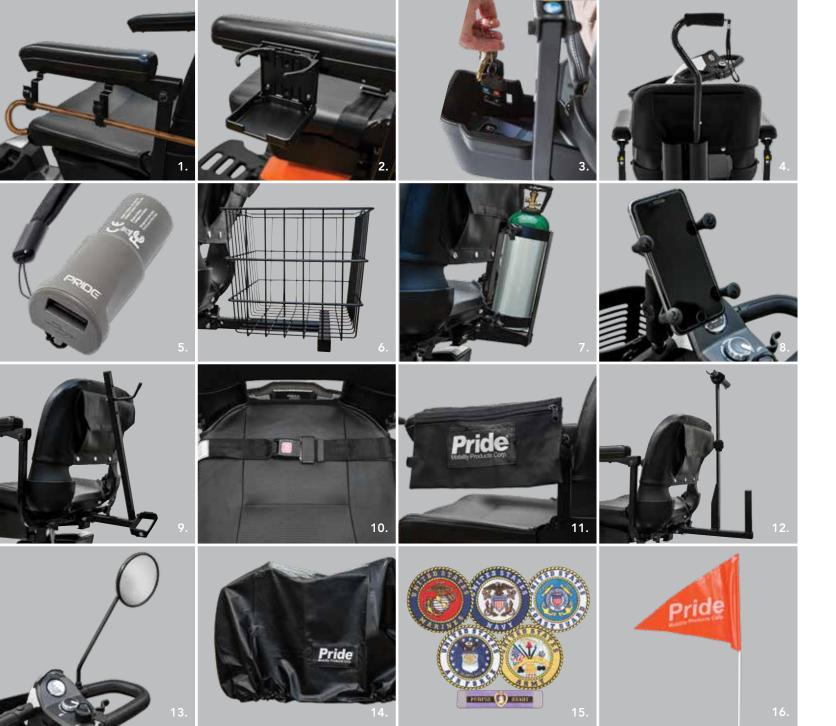

1. Cane Clip Attachment | 2. Cup Holder | 3. Under Seat Storage | 4. Single OR Double Cane Holder | 5. XLR USB Charger 6. Rear Basket | 7. Oxygen Holder | 8. Ram<sup>®</sup> X-Grip Cell Phone Holder | 9. Wishbone Crutch Holder | 10. Lap Belt | 11. Saddlebag 12. Walker Holder | 13. Rearview Mirror | 14. Weather Cover | 15. Military Patches | 16. Safety Flag

MODEL NAME / NUMBER	ZERO TURN 8 <sup>1</sup> / JAZZYZTS	ZERO TURN 10 <sup>1</sup> / S710ZT	WRANGLER <sup>®</sup> / MV600	iRIDE™ / S25	GO-GO ELITE TRAVELLER®1 PLUS / SC53 (3W), SC54 (4W)	GO-GO ELITE TRAVELLER®1 / SC40E (3W), SC44E (4W)	GO-GO <sup>®</sup> SPORT <sup>1</sup> / S73 (3W), S74 (4W)	GO-GO <sup>®</sup> FOLDING <sup>1</sup> / S19WH1001 (SLA) S19WH1002 (Lithium Ion)	GO-GO <sup>®</sup> LX WITH CTS <sup>1</sup> / SC50LX (3W), SC54LX (4W)	GO-GO® ULTRA X <sup>1</sup> / SC40X (3W), SC44X (4W)	MODEL NAME / NUMBER	GO-GO <sup>®</sup> ES2 <sup>1</sup> / S81	REVO <sup>®</sup> 2.0 <sup>1</sup> / S66 (3W), S67 (4W)	VICTORY <sup>®</sup> LX SPORT <sup>1</sup> / S710LXW	RAPTOR / R3-1700	VICTORY® 10.21 / S6102 (3W), S7102 (4W)	VICTORY® 10 <sup>1</sup> / SC610 (3W), SC710 (4W)	VICTORY <sup>®</sup> 9 <sup>1</sup> / SC609 (3W), SC709 (4W)	MAXIMA <sup>1</sup> / SC900 (3W), SC940 (4W)
WEIGHT CAPACITY	325 lbs.	400 lbs.	350 lbs.	250 lbs.	300 lbs.	300 lbs.	325 lbs.	250 lbs.	300 lbs.	260 lbs.	WEIGHT CAPACITY	250 lbs.	400 lbs.	400 lbs.	400 lbs.	400 lbs.	400 lbs.	300 lbs.	500 lbs.
MAXIMUM SPEED <sup>2</sup>	Up to 5.9 mph	Up to 7.2 mph	Up to 11 mph at 350 lbs. Up to 11.4 mph at 200 lbs.	Up to 3.7 mph	Up to 4.5 mph	Up to 4 mph	Up to 4.7 mph	Up to 4 mph	Up to 4.4 mph	Up to 4 mph	MAXIMUM SPEED <sup>2</sup>	Up to 4 mph	Up to 5 mph	Up to 8 mph	Up to 14 mph	Up to 5.2 mph	Up to 5.3 mph	Up to 5.3 mph	Up to 5.3 mph
GROUND CLEARANCE <sup>3,8,9</sup>	1.3" at motor, 1.5" at anti-tip, 3.5" ( <i>side deck</i> )	2" at motor	5.5" at motor	1.3" at motor	1.7" at transaxle, 0.83" at anti-tip, 2.6" at side deck	1.38" at motor, 0.75" at anti-tip, 2.25" at mid frame	1.5" at motor, 0.75" at anti-tip	2.3"	1.5" at motor / 0.75" at anti-tip	3W: 3.1" at deck 4W: 3" at deck	GROUND CLEARANCE <sup>3,8,9</sup>	1.5" at motor / 0.75" at anti-tip	3W: 3.25" at side deck 4W: 3.5" at side deck	2.2" at motor, 3.15" at mid-frame	3.5" at center of frame, 1.37" at anti-tip, 6.18" at highest point	2.4" at transaxle, 2.1" at anti-tip, 3" at side deck	3W: 2.2" at motor, 1.26" at anti-tip, 3.4" at side deck 4W: 2" at motor, 1.5" at anti-tip 3.1" at side deck	3W: 1.8" at transaxle, 1.4" at anti-tip, 2.7" at side deck 4W: 1.8" at transaxle, 1.4" at anti-tip, 2.1"at motor bracket bolt	3W: 2.5"at motor, 4.5" at side deck, 2" at anti-tip 4W: 2.5" at motor, 1.5" at anti-tip, 3.25" at highest point
TURNING RADIUS <sup>3</sup>	37.25"	43"	94.75"	33.5″	3W: 34.5" 4W: 45.75"	3W: 33" 4W: 44"	3W: 36" 4W: 50.5"	32"	3W: 33" 4W: 44.75"	3W: 33" 4W: 44"	TURNING RADIUS <sup>3</sup>	31"	3W: 40" 4W: 52"	61.25"	60"	3W: 42" 4W: 52.25"	3W: 42" 4W: 54"	3W: 40.25" 4W: 51.5"	3W: 50.5" 4W: 54"
OVERALL LENGTH / WIDTH <sup>3,7</sup>	45.75" / 20.75"	48" / 24.25"	61.25" / 32.5"	38"/ 19.25"	3W: 40", 4W: 40.25" / 21.25"	3W: 37" 4-W: 39.5" / 19.5"	3W: 42" 4W: 43" / 21.25"	37" / 19"	3W: 39.75" 4W: 41" / 20.5"	3W: 37" 4W: 39.5" / 19.5"	OVERALL LENGTH / WIDTH <sup>3,7</sup>	36.75" / 19.5″	3W: 46" 4W: 47" / 20.75"	47" / 25.5"	59" / 27.12"	3W: 45" 4W: 47.25" / 22.25"	3W: 45.25" 4W: 47" / 22.25"	3W: 43.5" 4W: 45.5" / 3W: 22.25" 4W: 22.5"	3W: 46" 4W: 47" / 3W: 25.5" 4W: 25.5"
SEAT-TO-GROUND HEIGHT	21.5" - 23.5"	23" - 25"	30" - 31.5"	18" – 20"	20.5"- 22"	18.25"-20.25"	20.5" - 22"	20.5"	20.75" - 22.25"	18.25" - 20.25"	SEAT-TO-GROUND HEIGHT	19″-20"	21"- 23.5"	23" - 25"	28"	22" – 24"	20.5"-22"	19.25"-20.75"	22.5" - 24.5"
SEAT-TO-DECK HEIGHT	17" - 18.5"	18"-20"	18.75" - 20.25"	8.75" – 10.75"	16.25"- 17.75"	15.75"-17.25"	17" - 18"	13"	16.25" - 17.25"	15.75" - 17.25"	SEAT-TO-DECK HEIGHT	16.25"-17.25"	15"-18"	16.5" -18.5"	19"	15.25" – 17.25"	17.5"-19"	17.25"-18.75"	16" - 18"
FRONT WHEELS	2"x7" solid	9" solid	14.5" tubeless pneumatic	6.5″ solid	3W: 2" × 8" 4W: 2" × 8"	3W: 2" x 8" solid 4W: 2" x 7" solid	3W: 3" x 8" solid 4W: 3" x 9" solid	1.5" x 7" solid	3W: 2" x 8" solid 4W: 2" x 7" solid	3W: 2" x 8" solid 4W: 2" x 7" solid	FRONT WHEELS	2" x 7.5" solid	3W: 3" x 8" solid 4W: 3" x 9" solid	3.5" x 10" solid	3" x 16" Tubeless Pneumatic	3.5" x 10" solid	3.5" x 10" solid	3W: 3" x 8" solid 4W: 3" x 9" solid	3" x 10" solid
REAR WHEELS	2.5"x9" solid	10.75" solid	14.5" tubeless pneumatic	6.75″ solid	3" x 9" solid	2.5" x 8" solid	3" x 9" solid	2" x 8" solid	2.5" x 8" solid	2.5" x 8" solid	REAR WHEELS (TIRES)	3" x 7.5" solid	3" x 9" solid	3.5" x 10" solid	3" x 16" Tubeless Pneumatic	3.5" x 10" solid	3.5" x 10" solid	3" x 9" solid	4" x 10" solid
SUSPENSION	Front and rear (CTS)	Front and rear (CTS)	Front and rear (CTS)	N/A	N/A	N/A	N/A	N/A	Front and rear (CTS)	N/A	SUSPENSION	N/A	Front and rear (CTS)	Front and rear (CTS)	Front and rear	N/A	N/A	N/A	N/A
RANGE PER CHARGE <sup>s</sup>	Up to 11 miles (at 325 lbs.) Up to 13.1 miles (at 200 lbs.)	Up to 18 miles (at 400 lbs.) Up to 24 miles (at 200 lbs.)	Up to 18.6 miles (75 AH @ 350 lbs.) Up to 22.6 miles (75AH @ 200 lbs.) Up to 24.2 miles (100 AH/ travel battery @250 lbs.) Up to 29.4 miles (100 AH/ travel battery @200 lbs.)	Up to 10.3 miles at 250 lbs. Up to 12.7 miles at 200 lbs.	3W: Up to 14.5 miles 4W: Up to 14.5 miles	3W: Up to 8.5 miles (12 AH) 4W: Up to 8.2 miles (12 AH) 3W: Up to 12.4 miles (18 AH) 4W: Up to 12 miles (18 AH)	3W: Up to 15.9 miles 4W: Up to 14.5 miles	Up to 13 miles (lithium ion) Up to 9.3 miles (sealed lead acid)	3W: Up to 8 miles 4W: Up to 8.6 miles	3W: Up to 6.9 miles 4W: Up to 7.2 miles	RANGE PER CHARGE <sup>s</sup>	Up to 6.8 miles	3W: Up to 17.4 miles (at 200 lbs.) Up to 13.2 miles (at 400 lbs.) 4W: Up to 17.8 miles (200 lbs.) Up to 12.4 miles (at 400 lbs.)	Up to 19.7 miles (at 200 lbs.) Up to 13 miles (at 400 lbs.)	19 miles (up to 400 lbs. and full speed) 31 miles (up to 220 lbs. and at low speed)	3W/4W: Up to 11 miles (U-1) 3W: Up to 13 miles (40 AH) 4W: Up to 13.5 miles (40 AH)	Up to 16 miles	Up to 13 miles	3W: Up to 18 miles U-1 ( <i>Power Elevating Seat,</i> up to 9.6 miles) 4W: Up to 16 miles
HEAVIEST PIECE <sup>3</sup>	48 lbs. (rear section)	75 lbs. (front section)	219 lbs. (unit does not disassemble)	32 lbs. (Base only)		3W: 29 lbs. (front section) 4W: 34 lbs. (front section)		51 lbs. (unit does not disassemble, unit weight without battery pack)	3W: 34 lbs. (front section) 4W: 37 lbs. (front section)	3W: 29 lbs. (front section) 4W: 34 lbs. (front section)	HEAVIEST PIECE <sup>3</sup>	41 lbs. (scooter base)	3W: 48 lbs. (rear section) 4W: 57 lbs. (front section)	77 lbs. (front section)	313.6 lbs. (unit does not disassemble, weight includes seat, base and batteries)		3W: 54 lbs. (front section) 4W: 61 lbs. (front section)	3W: 48 lbs. (front section) 4W: 59 lbs. (front section)	76 lbs. (rear section)
STANDARD SEATING	Type: Compact, foldable Weight: 27 lbs. Material: Black vinyl Dimensions: Width: 17", Depth: 17", Back height: 14"	Type: Foldable, deluxe contour Weight: 34 lbs. or Foldable, compact Weight: 30 lbs. Material: Black vinyl Dimensions: Width: 18", Depth: 17"	Type: Pillow-top, limited recline Weight: 48.6 lbs. Material: Black vinyl Dimensions: Width: 18.5", Depth: 16.5"	Type: Compact, removable Weight: 10 lbs. Material: Molded plastic Dimensions: 14.75" x 13.5"	Type: Compact, foldable Weight: 23 lbs. Material: Black vinyl Dimensions: Width: 17", Depth: 17"	Type: Compact, foldable Weight: 23 lbs. Material: Black vinyl Dimensions: Width: 17", Depth: 17"	Type: Compact, foldable Weight: 23 lbs. Material: Black vinyl Dimensions: Width: 17", Depth: 17"	Type: Compact, foldable Material: Gray vinyl Dimensions: Width: 16", Depth: 13"	Type: Compact, foldable Weight: 23 lbs. Material: Black vinyl Width: 17", Depth: 17"	Type: Compact, foldable Weight: 23 lbs. Material: Black vinyl Dimensions: Width: 17", Depth: 17"	STANDARD SEATING	Type: Compact, foldable Weight: 17 lbs. Material: Black vinyl Dimensions: Width: 17". Depth: 15"	Type: Compact, foldable Material: Black vinyl Dimensions: Width: 20", Depth: 18"	Type: Limited reclining high-back Weight: 43 lbs. Material: Black vinyl Dimensions: Width: 18", Depth: 18"	Type: Limited reclining high back with headrest Weight: 37 lbs. Material: Black vinyl Dimensions: Width: 20", Depth: 18"	Type: Compact, foldable Weight: 28.5 lbs. Material: Black vinyl Dimensions: Width: 18", Depth: 17"	Type: Compact, foldable Weight: 28 lbs. Material: Black vinyl Dimensions: Width: 18", Depth: 17"	Type: Compact, foldable Weight: 28 lbs. Material: Black vinyl Dimensions: Width: 18°, Depth: 17°	Type: Deluxe contoured medium-back Weight: 40 lbs. Material: Black vinyl Dimensions: 22" x 18"
DRIVE SYSTEM	24-volt DC motor, rear-wheel drive, dual in-line	24-volt DC motor, rear-wheel drive, dual in-line	24-volt DC motor, rear-wheel drive, dual in-line	36 volt brushless hub motor	24-volt DC motor, sealed transaxle	24-volt DC motor, sealed transaxle	24-volt DC motor, sealed transaxle	4-Pole 270w	24-volt DC motor, sealed transaxle	24-volt DC motor, sealed transaxle	DRIVE SYSTEM	24-volt DC motor, sealed mini-transaxle	24-volt DC motor, rear- wheel drive, sealed transaxle	24-volt DC motor, rear- wheel drive, sealed transaxle	24-volt DC motor, rear- wheel drive, sealed transaxle	24-volt DC motor, rear- wheel drive, sealed transaxle	24-volt DC motor, rear- wheel drive, sealed transaxle	24-volt DC motor, rear- wheel drive, sealed transaxle	24-volt DC motor, rear- wheel drive, sealed transaxle
BRAKING SYSTEM	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical	Manual, dual disc	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical	BRAKING SYSTEM	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical	Regenerative and electromechanical
BATTERIES⁴	(2) 22 AH	(2) 40 AH	(2) 75 AH (standard) (2) 100 AH (optional)	(1) 36 volt, 5.2 AH lithium ion	(2) 18 AH	(2) 12 AH (standard) or (2) 18 AH (optional)	(2) 18 AH	(2) 12 AH (standard, sealed lead acid) or (1) 11.5 AH (optional, lithium ion)	(2) 12 AH	(2) 12 AH	BATTERIES <sup>4</sup>	(2) 12 AH	(2) U-1	(2) 50 AH	(2) 75 AH	(2) U-1 (standard) (2) 40 AH (optional)	(2) U-1 (standard) (2) 40 AH (optional)	(2) U-1	(2) NF-22 (2) U-1 (Power Elevating Seat)
BATTERY WEIGHT <sup>5,6</sup>	Battery box 32 lbs., 13.5 lbs. each	30.25 lbs. each	75 AH – 48 lbs. each; 100 AH – 60 lbs. each	4.5 lbs.	14 lbs. each <sup>7</sup> 29.5 lbs. per battery pack	9 lbs. each ( <i>12 AH</i> ), 20 lbs. per battery pack 14 lbs. each ( <i>18 AH</i> ), 29.5 lbs. per battery pack	14 lbs. each 29.5 lbs. per battery pack	9 lbs. each (12 AH), 5 lbs. (11.5 AH)	9 lbs. each (12 AH), 20 lbs. per battery pack	9 lbs. each 20 lbs. per battery pack	BATTERY WEIGHT <sup>5,6</sup>	9 lbs. each	25 lbs. each	30.2 lbs. each	53 lbs. each	24 lbs. each (standard) 32 lbs. each (optional)	24.5 lbs. each (standard) 32.5 lbs. each (optional)	24 lbs. each	38 lbs. each ( <i>NF-22</i> ) 24 lbs. each (U-1)
BATTERY CHARGER	Off-board, 3.5 amp	Off-board, 3.5 amp	Off-board, 8 amp	36 volt lithium, off-board	Off-board, 2 amp	Off-board, 2 amp	Off-board, 2 amp	Off-board, 2-amp (sealed lead acid) or Off-board, 2.5-amp (lithium ion)	Off-board, 2 amp (12 AH)	Off-board, 2 amp	BATTERY CHARGER	Off-board, 2 amp	Off-board, 3.5-amp	Off-board, 5 amp	Off-board, 8 amp	Off-board, 3.5 amp (U-1) Off-board, 5 amp (40 AH)	Off-board, 3.5 amp (U-1) Off-board, 5 amp (40 AH)	Off-board, 3.5 amp	Off-board, 5 amp
HCPCS CODES	K0899*	K0899*	N/M (non-medical)	N/M (non-medical)	K0806 (Group 2, Standard)	K0800 (Group 1, Standard)	K0801 (Group 1, Heavy Duty)	K0899*	K0899*	K0899*	HCPCS CODES	K0800 (Group 1, Standard)	K0899*	K0899*	N/M (non-medical)	K0801 (Group 1, Heavy Duty)	K0801 (Group 1, Heavy Duty)	K0800 (Group 1, Standard)	(3W) K0802 (Group 1; Very Heavy Duty) (4W) K0808 (Group 2; Very Heavy Duty
WARRANTY	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drive motors: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drive motors: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: 2-year limited Drivetrain: 1-year limited Electronics: 1-year limited Battery: 6-months	Frame: lifetime limited 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: 2-year limited Controllers: 18-month limited Electronics: 1-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	WARRANTY	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months	Frame: lifetime limited Drivetrain: 2-year limited Electronics: 2-year limited Batteries: 6-months



## (US) 800-800-8586 | (CAN) 888-570-1113 | pridemobility.com | 🚺 🖸 💟 🚱



the iRIDE™ item on commercial aircraft is subject to federal regulations and airline policy. Please consult your airline prior to your flight to ensure your iRIDE™ and its lithium-ion battery are permitted.

Note: Transport of

- 1. Pride® FDA Class II Medical Devices are designed to aid individuals with mobility impairments.
- Varies with user weight, terrain type, battery amp- hour (AH), battery charge, battery condition and tire condition. This specification can be subject to a variance of (+ or -) 10%.
- Varies with user weight, terrain type, battery amp- hour (AH), battery charge, battery condition and tire condition. This specification can be subject to a variance of (+ or -) 10%.
- 4. Due to manufacturing tolerances and continual product improvement, this specification can be subject to variance of + or 3%.
- 5. Deep cycle (AGM or gel cell type recommended).
- 6. Tested in accordance with ANSI/RESNA, WC Vol 2, Section 4 and ISO 7176-4 standards. Results derived from theoretical calculations based on battery specifications and drive system performance. Test conducted at maximum weight capacity.
- 7. Battery weight may vary based on manufacturer.
- Width of base (not including seat).
- 9. Does not account for anti-tip clearance.
- 10. At midframe.
- Product is available exclusively to Authorized Pride Brick & Mortar Providers. No internet sales are permitted. Available in store only. Other conditions apply.

NOTE: All specifications subject to change without notice.

The information contained herein is correct at the time of publication; we reserve the right to alter specifications without prior notice. Speed and range vary with user weight, terrain type, battery charge, battery condition and tire pressure. Due to manufacturing tolerances and continual product improvement, length, width, turning radius and ground clearance can be subject to variance of + or - 3 %. Dimensions listed are for scooter only. Overall measurements will vary based on seating and accessory selections.

N/M: This product is not a medical device and is not intended to assist, treat, diagnose, or alleviate any medical condition or disability.

\*K0899 - power mobility device, not coded by dme pdac or does not meet criteria

\*\*Not all accessories are available for all products. Please speak with your Provider for details and availability.

HCPCS codes provided should not be considered as legal advice and do not guarantee reimbursement. DME providers are responsible for determining appropriate billing codes when submitting for insurance reimbursement.

